
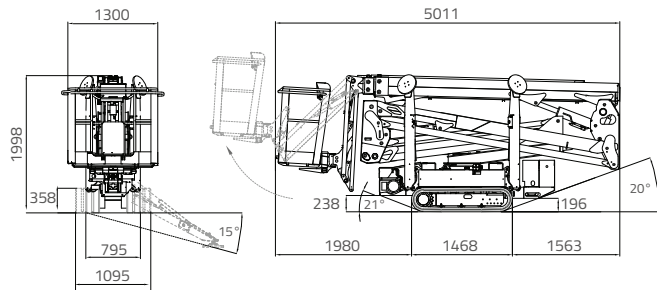


LIGHTLIFT 20.10

PERFORMANCE III MK2

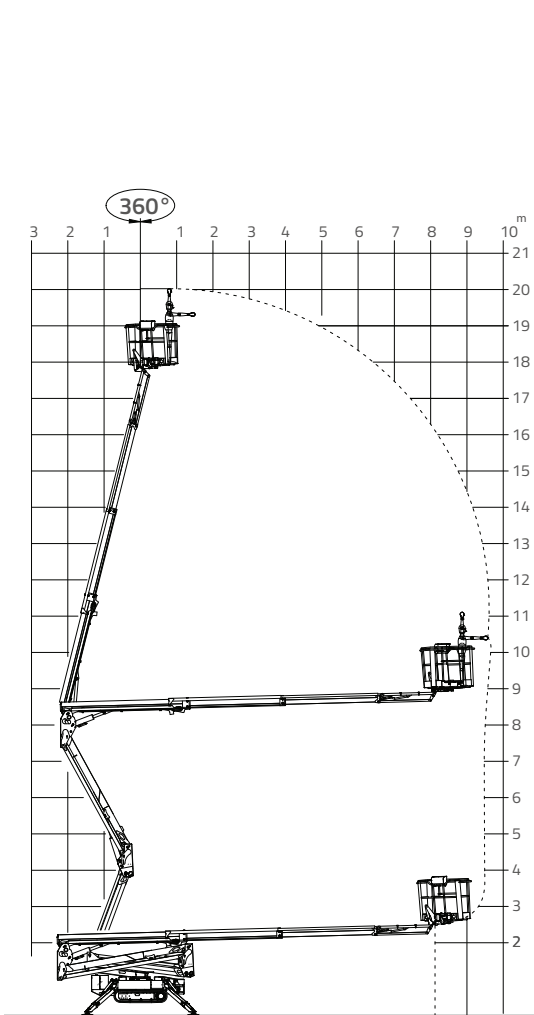

- 20,15 m
- 9,70 m
- 5,01 m
- 4,66 m
- 1,99 m
- 1335x690xh.1100 mm
- 124° (+/-62°)
- 16°/28,7%
- 2840 kg / 6261 lb (Honda)
2940 kg / 6481 lb (Perkins)
2950 kg / 6503 lb (lithium-ion)
- Honda IGX440 Automatic rpm control 12,7 CV - 3600rpm
Perkins 402.05 14CV - 3600 rpm

- 2,2kw-230V-50Hz
2,2kw-110V-50Hz
- 0,5-1,3-2,5 Km/h
- 795 - 1095 mm
- 2150 daN - 3,04 daN/cm²
- 2922x2925 mm
- Stabilisation et destabilisation automatique III S de série
Standaard kenmerken serie performance III S
- Télécommande
Afstandsbediening met kabel
- GPRS-GPS
- R.A.H.M.
- 100Ah/72V
Optionnel - Optioneel

